


INNOVATIVE TANK SOLUTIONS

SAFE-Tank®: a complete system for secondary containment.

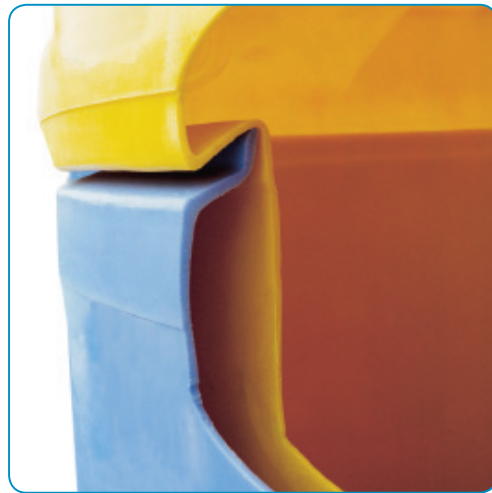

Poly Processing's SAFE-Tank® is a "tank-within-a-tank" system that keeps contaminants from entering the interstitial area. These tanks provide secondary containment to avoid the damaging of equipment or property, loss of chemical, or injury to employees in the event of a spill.

The SAFE-Tank®:

- Provides 110% secondary containment.
- Will equalize the liquid and allow the chemical to be continually used until it is convenient to repair the tank.
- Is ideal for chemicals like sulfuric acid that can have dangerous exothermic reactions to water.
- Eliminates the expense, cost and maintenance of secondary concrete containment.
- Minimizes the system's footprint by providing secondary containment in a more compact way.
- Adding an enhanced bellows transition fitting will maximize your SAFE-Tank® system's performance.

SAFE-Tank® systems are also available with OR-1000™ for superior antioxidant resistance.

CALIFORNIA
8055 S. Ash St.
French Camp, CA 95231
Tel: 877.325.3142

LOUISIANA
P.O. Box 4150
2201 Old Sterlington Rd.
Monroe, LA 71203
Tel: 866.590.6845
sales@polyprocessing.com

VIRGINIA
161 McGhee Rd.
Winchester, VA 22603
Tel: 866.590.6845

SAFE-TANK® SYSTEM



SAFE-Tank® SYSTEMS – STORAGE & CONTAINMENT

T ₁	F.O.B.			Stock Number	Nominal Capacity	Approx. O.D.	Approx. Overall Height	Lid Size	Ladder Height
	LA	VA	CA						
	4		1	2008700					
	4		1	2110150					
L	•			Assembly	8,700	11'-11"	14'-6"	24"	15'
	4		1	2006650					
	4		1	2107450					
L	•			Assembly	6,650	10'-3"	14'-3"	24"	14'
	4			2005400					
	4			2106300					
L	•			Assembly	5,400	11'-11"	9'-9"	24"	10'
		7	1	2004400					
		7	1	2104950					
L	•			Assembly	4,400	10'-3"	10'-3"	24"	10'
	4			2003150					
	4			2103550					
L	•			Assembly	3,150	10'-2"	7'-7"	24"	7'
	4			2002500					
	4			2103100					
L	•			Assembly	2,500	8'-0"	9'-11"	17"	10'
		7		2001550					
		7		2101950					
•				Assembly	1,550	8'-0"	6'-11"	17"	7'
		7	1	2001000					
		7	1	2101200					
•				Assembly	1,000	6'-5"	6'-7"	17"	6'
	4			2000540					
	4			2100655					
•				Assembly	540	6'-5"	4'-0"	17"	
		7	1	2000405					
		7	1	2100445					
				Assembly	405	4'-0"	5'-9"	7"	
	4	7	1	2000160					
	4	7	1	2100220					
				Assembly	160	3'-0"	4'-11"	7"	
	4	7	1	2000105					
	4	7	1	2100150					
				Assembly	105	3'-0"	3'-6"	7"	
	4			2000055					
	4			2100085					
				Assembly	55	3'-0"	2'-5"	7"	

• = Molded-in lifting lugs
 L = Molded-in ladder attachment lugs

